


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (DC)
	3-5:11,12-9,10:2-1:8-7	3-5	3-5 (short other pins)	3-5	2-1	8-7	11,12-9,10	pin (2,3-8,9,10)
EFD-080SG	1:0.25:0.688:0.313	L _{0A} =60 L _{2,2A} ≥ 90%(L _{0A})	0.8	190	320	135	12	1500

SCHEMATICS

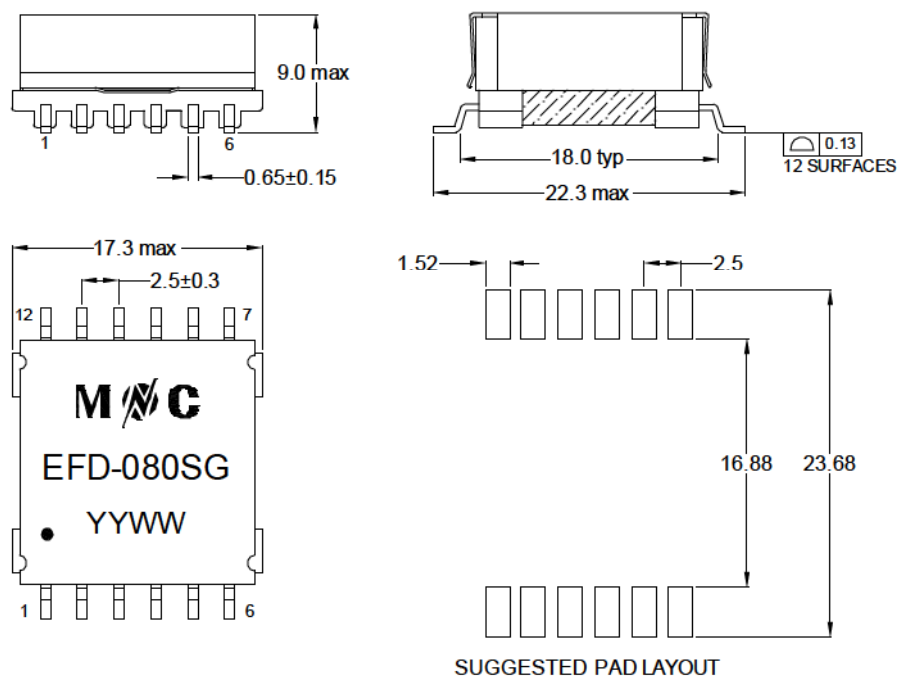

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

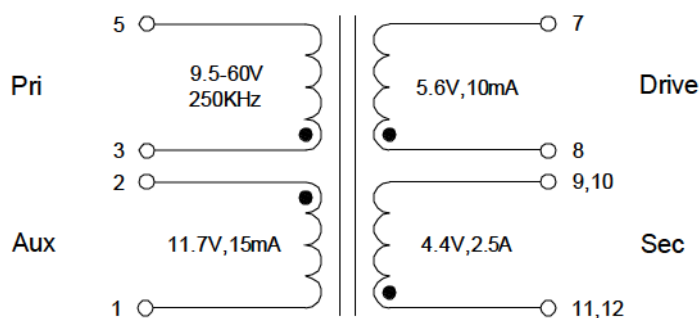

Tape&Reel Weigh 250pcs per reel
6.3g/pcs