


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)			HI-POT (Vrms)
	1,2-3,4:12,11,10-9,8,7:5-6	1,2-3,4	1,2-3,4 (short other pins)	1,2-3,4	5-6	12,11,10-9,8,7	Pri/Aux-Sec
EFD-268SG	1:0.143:0.333	L _{0A} =42 L _{2.6A} ≥ 90%(L _{0A})	1.6	69	225	5.0	1500

SCHEMATICS

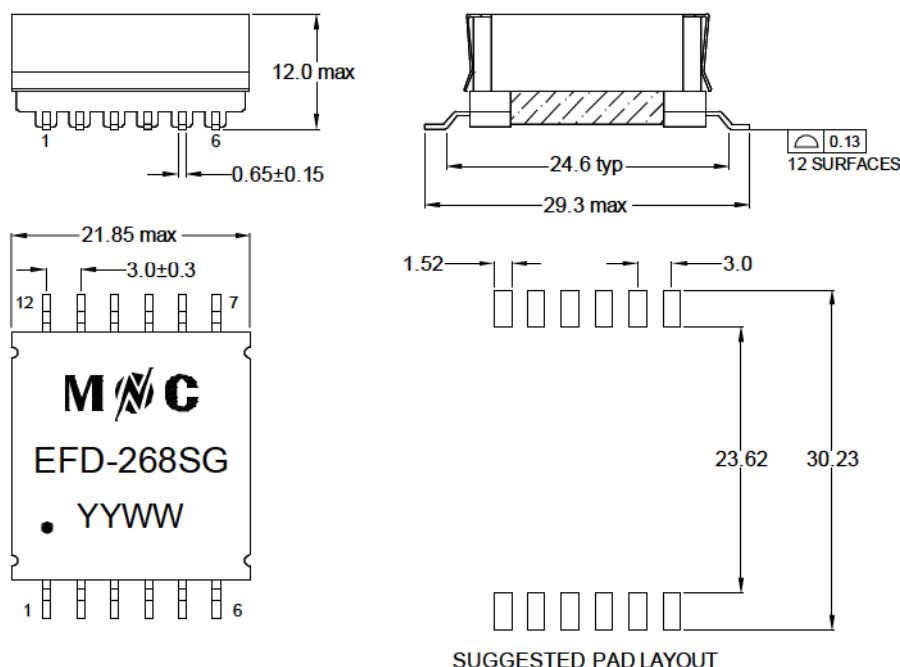

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

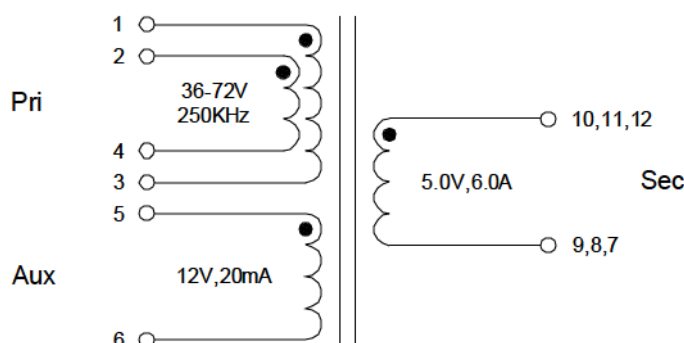

Tape&Reel Weight 150pcs per reel 12.58g/pcs