


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.1V	LK(uH max) @200KHz,0.1V	DCR (mΩ max)			HI-POT (Vrms)
	5-3:6,7-9,10:2-1	5-3	5-3 (short other pins)	5-3	2-1	6,7-9,10	Pri/Aux-Sec
EP-421SG	1:0.2:0.5	37	1.0	89	84	6.2	1500

SCHEMATICS

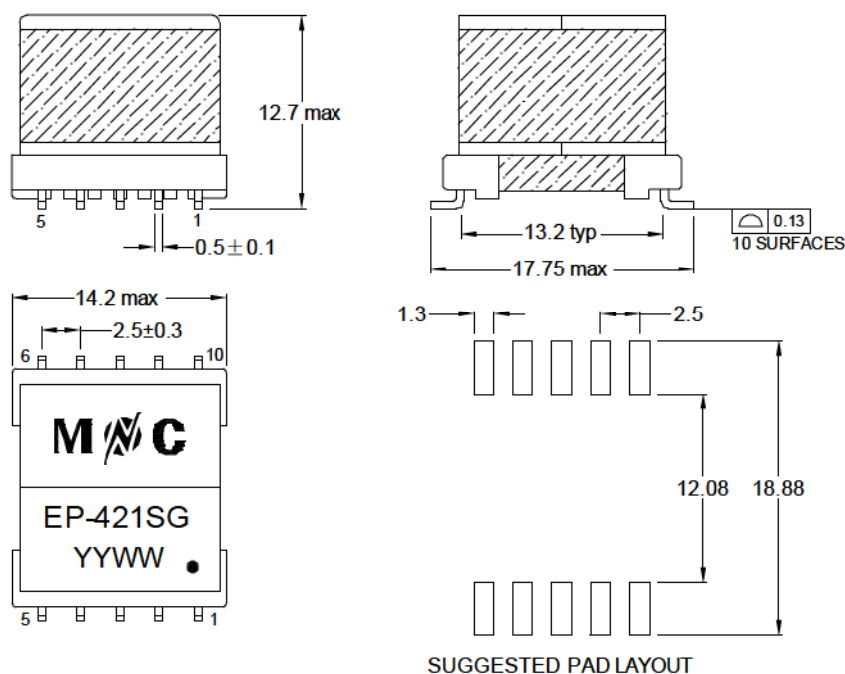

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

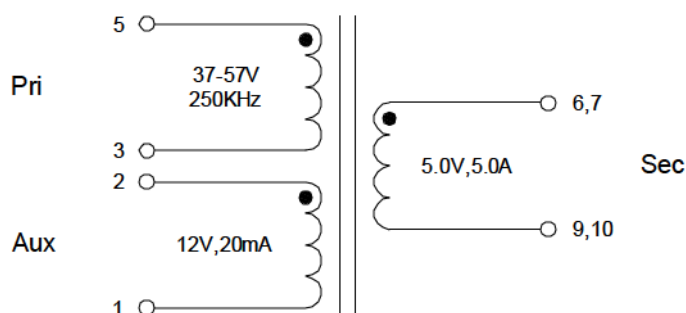

Tape&Reel Weigh 200pcs per reel 6.87g/pcs