


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.1V	LK(uH max) @200KHz,0.1V	DCR (mΩ max)		HI-POT (Vrms)
	3-2:5,6-7,8	3-2	3-2 (short other pins)	3-2	5,6-7,8	Pri-Sec
EP-464SG	1:0.4	L _{0A} =40 L _{1.3A} ≥ 90%(L _{0A})	1.0	98	85	1500

SCHEMATICS

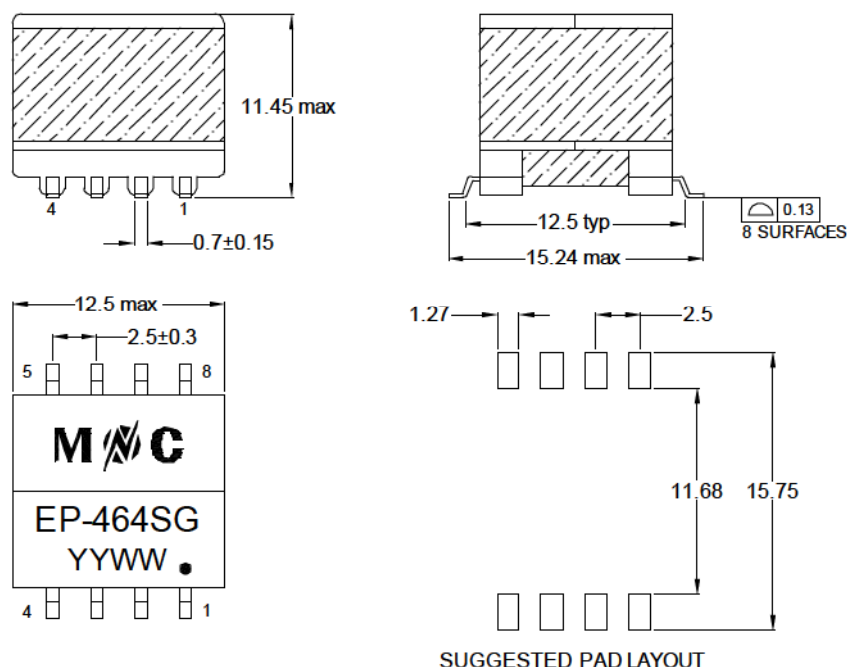

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

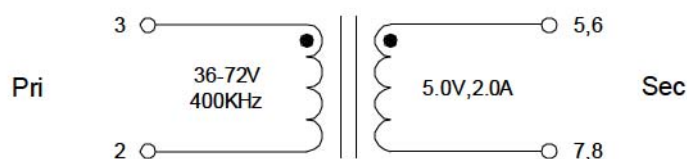

Tape&Reel Weigh 250pcs per reel
2.64g/pcs