


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)			HI-POT (Vrms)
	5-3:6-10:2-1	5-3	5-3 (short other pins)	5-3	2-1	6-10	Pri/Aux-Sec
EP-475SG	1:0.5:0.55	L _{0A} =38 L _{3.5A} ≥ 80%(L _{0A})	0.5	95	170	28	1500

SCHEMATICS

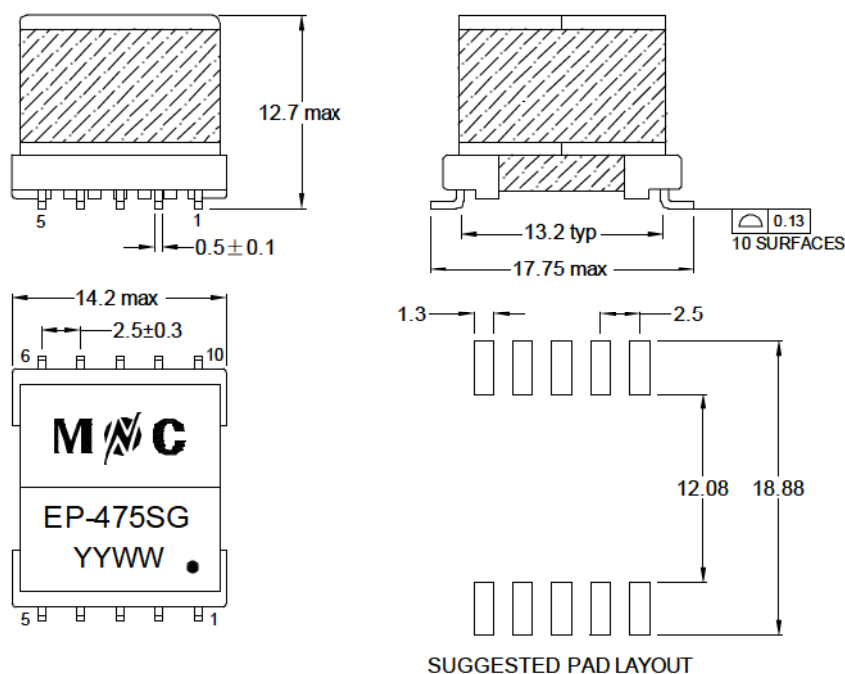

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

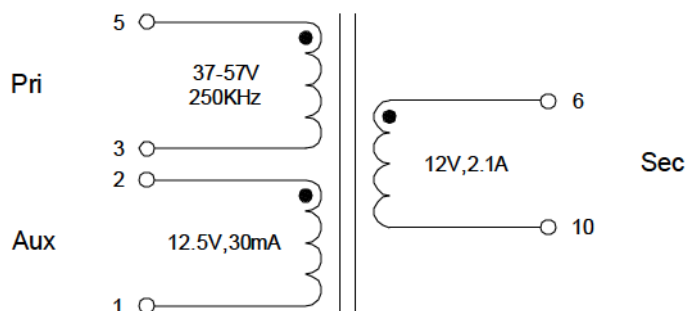

Tape&Reel Weigh 200pcs per reel 6.46g/pcs