


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.1V	LK(uH max) @200KHz,0.1V	DCR (mΩ max)		HI-POT (Vrms)
	1-3:10,9-6,7	1-3	1-3 (short other pins)	1-3	10,9-6,7	Pri-Sec
EP-808SG	1:0.3	L _{0A} =97 L _{1.2A} ≥ 90%(L _{0A})	5.0	232	20	2500

SCHEMATICS

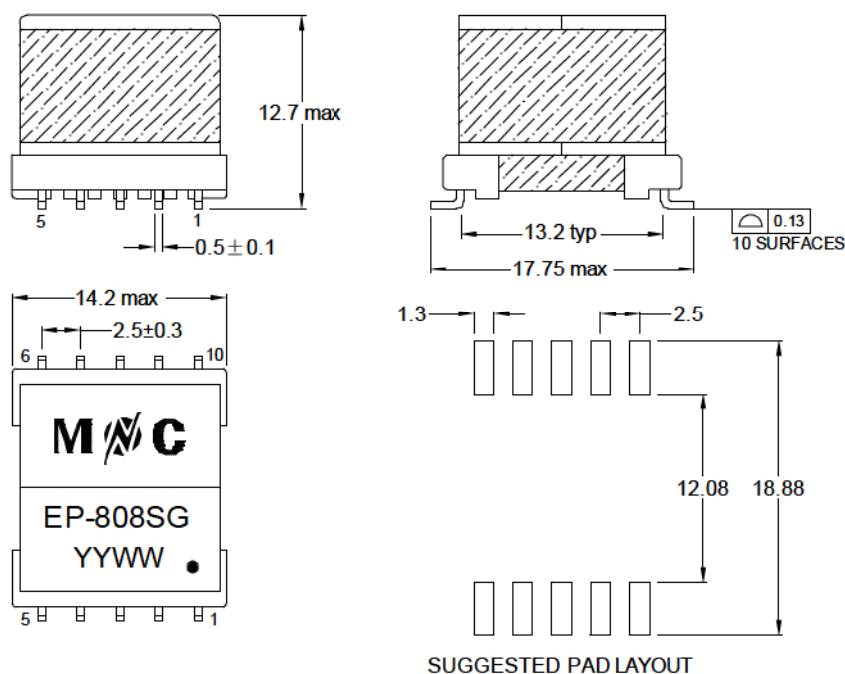

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

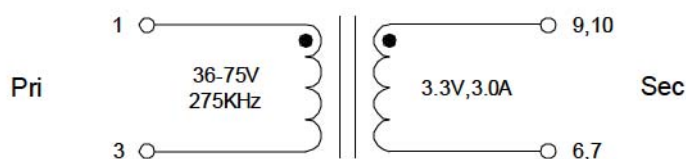

Tape&Reel Weigh 200pcs per reel
6.30g/pcs