





- RF Transformer
- Solder profile acc.J-STD-020C 250°C Max Reflow Temp
- Operating temperature range: -20 °C to +85 °C
- Storage temperature range: -55 °C to +100 °C
- RoHS compliant



Electrical Specifications @25°C,Z0=75Ω											
Part Number	Ω Ratio	Insertion Loss(MHz)			Amplitude Unbalance (MHz)		Phase Unbalance (MHz)		RF Power	DC Current	Frequency
	Pri:Sec (1-3;4-6)	1-400	0.5-700	0.4-800	1-400	0.5-700	1-400	0.5-700			
RFT-068SG	1:1	1.0 dB	2.0 dB	3.0 dB	0.1dB Typ	0.5dB Typ	1° Typ	4° Typ	0.5W	30 mA	0.4-800 MHz

Insertion loss is referenced to mid-band loss,0.3dB Typ

MECHANICAL DIMENSIONS(unit:mm)

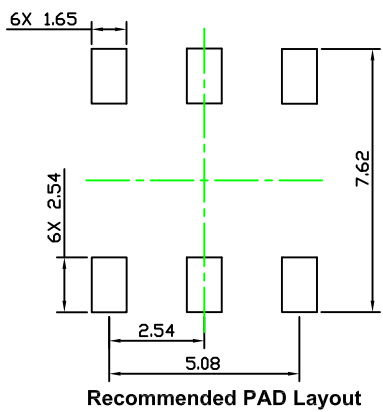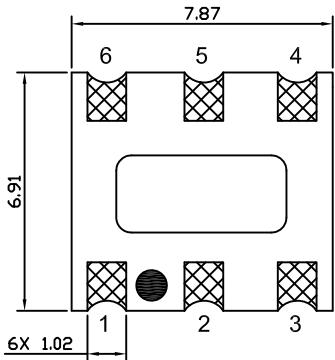

Unless otherwise specified all tolerances are:±0.25 mm

SCHEMATIC

