

Product Specification

CUSTOMER: _____

DESCRIPTION: _____

RF TRANSFORMER

MNC P/N: _____

RFT-136SG

REVISION: _____

X0

CUSTOMER P/N: _____

ISSUED DATE: _____

2017-05-05

PHOTO OF
PRODUCT: _____

WEIGHT: _____

0.49g

PREPARED BY	CHECKED BY	APPROVED BY
Jimmy Huang	Sonny Zhang	CW Wang

INDEX

1.INDEX	1
2.CHANGE RECORD	1
3.ELECTRICAL SPECIFICATION	2
4.MECHANICAL DIMENSIONS	2
5.SCHEMATIC	2
6.PACKING	3
7.RECOMMENDED SOLDERING PROFILE	4

CHANGE RECORD

REV.	DESCRIPTION (Content or Reason For Change)	DATE	REVISER
X0	INITIAL RELEASE	2017-05-05	Jimmy Huang


- RF Transformer
- Operating Temperature Range: -40 °C to +85 °C
- Storage Temperature Range: -55 °C to +100 °C
- RoHS Compliant

Electrical Specifications @25°C, Z₀=50Ω

Part Number	Turns Ratio	Ω Ratio	Insertion Loss	DC Current	Frequency
	Pri:Sec (P1-3:P6-4)	Pri:Sec (P1-3:P6-4)	0.05-200MHz	250mA Max	0.05-200MHz
RFT-136SG	1:1±5%	1:1	3.0dB Max		


Note: Insertion Loss is referenced to mid-band loss 0.35dB Typ.

MECHANICAL DIMENSIONS(units:mm)

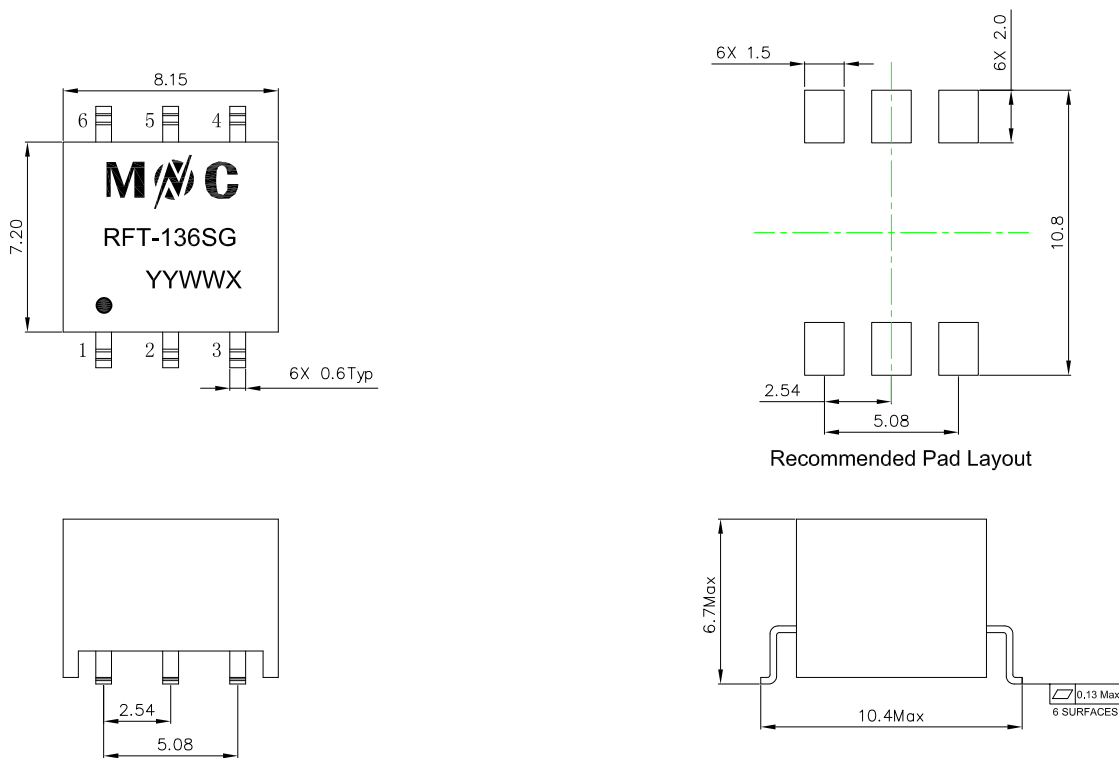




Unless otherwise specified all tolerances are: ±0.25 mm

SCHEMATIC

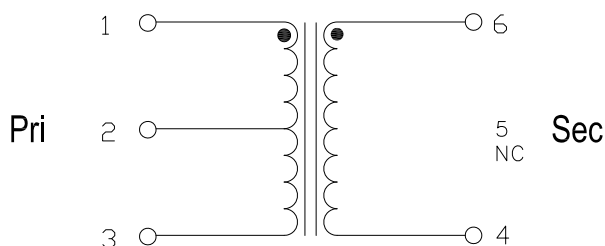

PACKING:

☐ Tray:





Q'ty

_____ PCS Per Tray

_____ PCS Per Carton

☐ Tube:





Q'ty

_____ PCS Per Tube

_____ PCS Per Carton

☒ Reel:

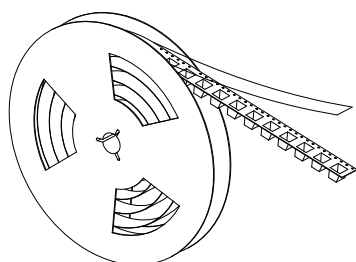

Vacuumize Package

Q'ty

750 PCS Per Reel

6000 PCS Per Carton

MOISTURE SENSITIVE LEVEL:

1. Level:1

2.Shelf Life:Unlimited

3.Storage Condition:<=30℃/85% RH

RECOMMENDED SOLDERING PROFILE:

☒ 1. Reflow soldering profile(According to IPC/JEDEC J-STD-020C)

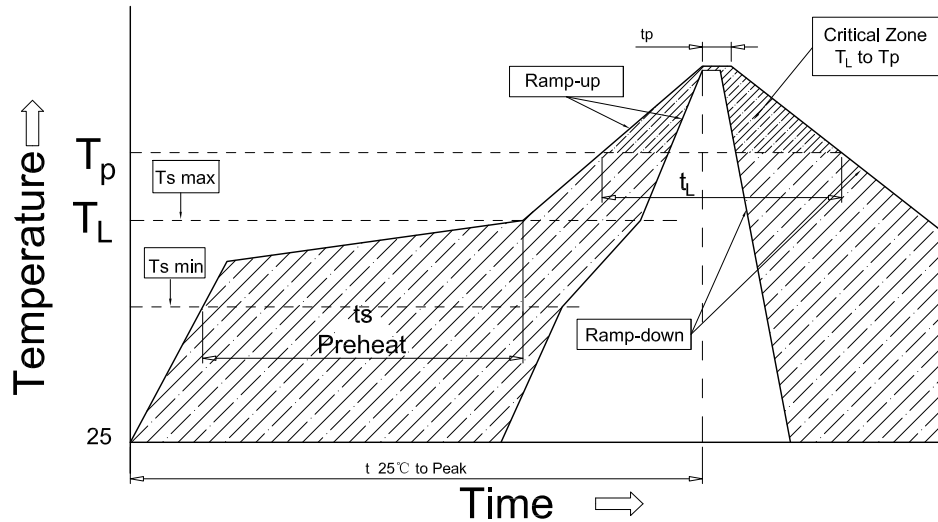


Table 1-1 Classification Reflow Profiles

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average Ramp-Up Rate (T _{smax} to T _p)	3°C/second max	3°C/second max
Preheat		
-Temperature Min (T _{smin})	100°C	150°C
-Temperature Max (T _{smax})	150°C	200°C
-Time (t _{smin} to t _{smax})	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T _L)	183°C	217°C
-Time (t _L)	60-150 seconds	60-150 seconds
Peak/Classification Temperature(T _p)	See IPC/JEDEC J-STD-020C Table 4-1	See IPC/JEDEC J-STD-020C Table 4-2
Time within 5°C of actual Peak Temperature(t _p)	10-30 seconds	20-40 seconds
Ramp-Down Rate	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max	8 minutes max

Note1: All temperatures refer to topside of the package, measured on the package body surface

- Suggested soldering process: Reflow soldering
- Solder Paste: Sn96.5Ag3.0Cu0.5
- Silkscreen thickness: 0.15mm Min.

☐ 2. Wave soldering profile

